



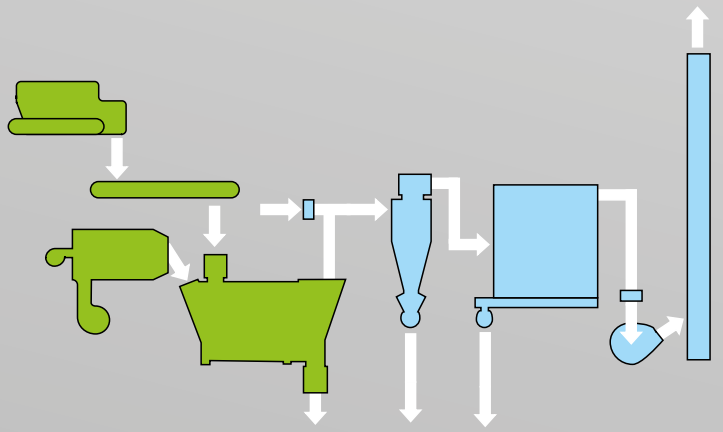


## Rapid Dryers

- Drying of all type of minerals
- Capacity up to 250 t/h depending on the product moisture
- Single or double shaft to ensure that the residual moisture fits to the technical specifications
- Many fittings : anti-abrasion wear plates, internal equipment , ... to meet the property of each product.
- Clod breaking of the material thanks shaft-shakers
- Adjustable baffles which affect the residence time of the product in the dryer
- Possibility to use heated gases from another process

# Rapid Dryers

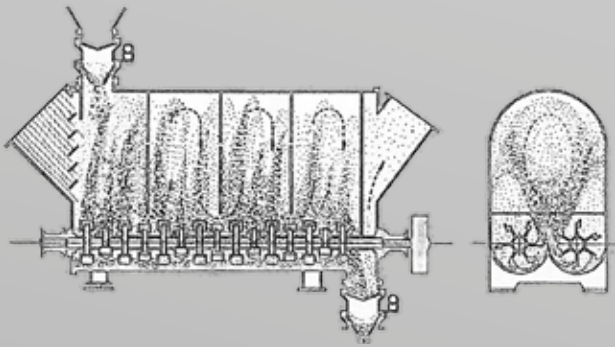

Type	Nb Shaft	Approximate dimensions - mm			
		A	B	C	D
S 0425	1	3,500	900	1,400	2,500
S 0630	1	4,200	1,300	2,000	3,100
S 0836	1	5,200	1,700	2,500	3,700
S 0940	1	6,000	2,100	3,200	4,100
SS 0425	2	3,400	1,000	1,500	2,500
SS 0630	2	4,400	1,500	2,700	3,100
SS 0836	2	5,250	1,900	3,330	3,700
SS 0940	2	6,100	2,200	3,200	4,100
SS 0946	2	7,100	2,200	3,600	4,600
SS 1051	2	7,600	2,600	3,900	5,100
SS 1061	2	8,900	2,600	4,100	6,100
SS 1261	2	8,900	3,000	4,600	6,100
SS 1561	2	8,830	3,550	5,055	6,100
SS 1576	2	10,350	3,550	5,055	7,600
SS 1860	2	9,050	4,110	5,600	6,100
SS 1876	2	10,570	4,110	5,600	7,600
SS 2161	2	9,050	4,800	7,100	6,100
SS 2476	2	11,480	5,440	7,920	7,600

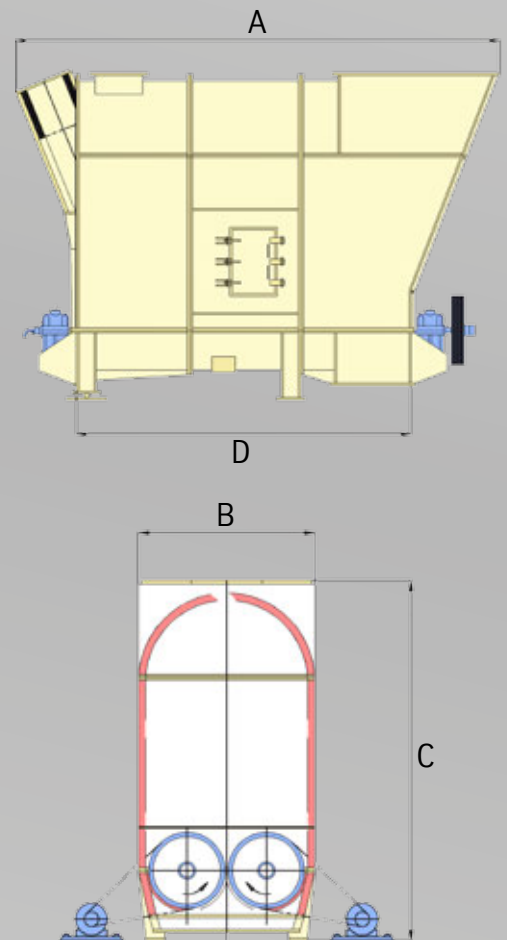

KH Mineral has also a line of fine-crushing products (Unirotor, Birotor) with integrated drying and impact crushers-dryers with the PT model.

## ThyssenKrupp KH Mineral SAS

Parc Industriel Sud - ZI Neuwald

1, rue René François Jolly

B.P. 70537

F-57205 Sarreguemines

Tél. (33) 03 87 98 73 73 - Fax (33) 03 87 98 89 18 ou (33) 03 87 95 40 73

Email : [contact@khmineral.com](mailto:contact@khmineral.com)

Internet : [www.khmineral.com](http://www.khmineral.com)

