


Vertical Shaft Impactors - Multirok[®] MR

- Heavy duty shoes
- Multirok[®] with open shoe table and anvil ring
- Vibration detector
- Multirok[®] with closed rotor fitted with carbide pins against rock shelf (for a good shape of stones)
- Pedestal assembly uses heavy duty spherical roller bearings lubricated through a full flow filter protected system


Vertical Shaft Impactors - Multirok® MR

Type	Capacity(*) t/h	Motor kW	Maxi. Feeding Open Shoe Table mm	Maxi. Feeding Gravirotor mm	Weight kg
7	120 - 200	160	75	38	7,000
9	150 - 300	250	125	63	10,000
9 DUO	200 - 400	2 x 200	125	63	12,500

Limestone - Multirok® fitted with open shoe table

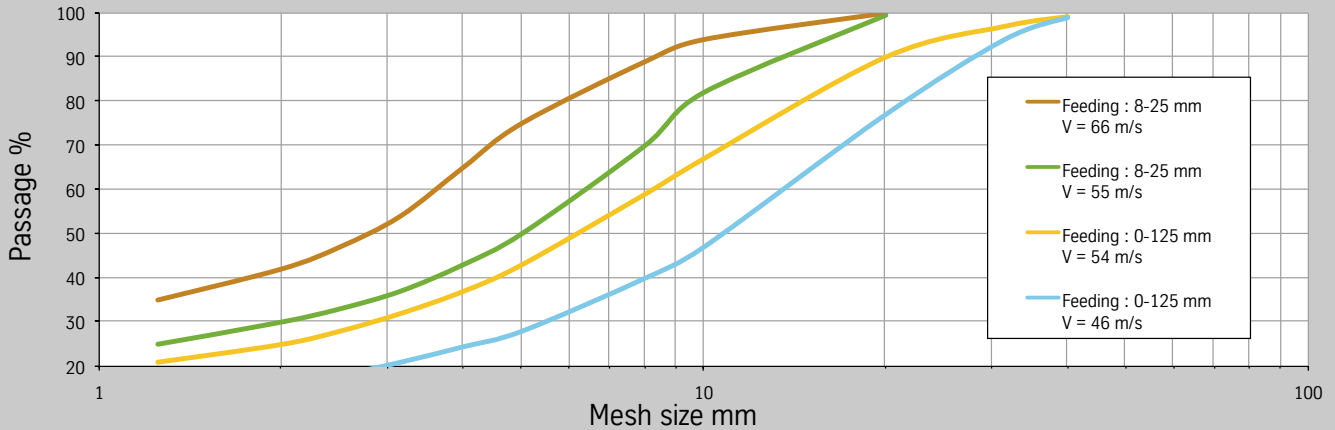

River gravel - Multirok® fitted with gravirotor

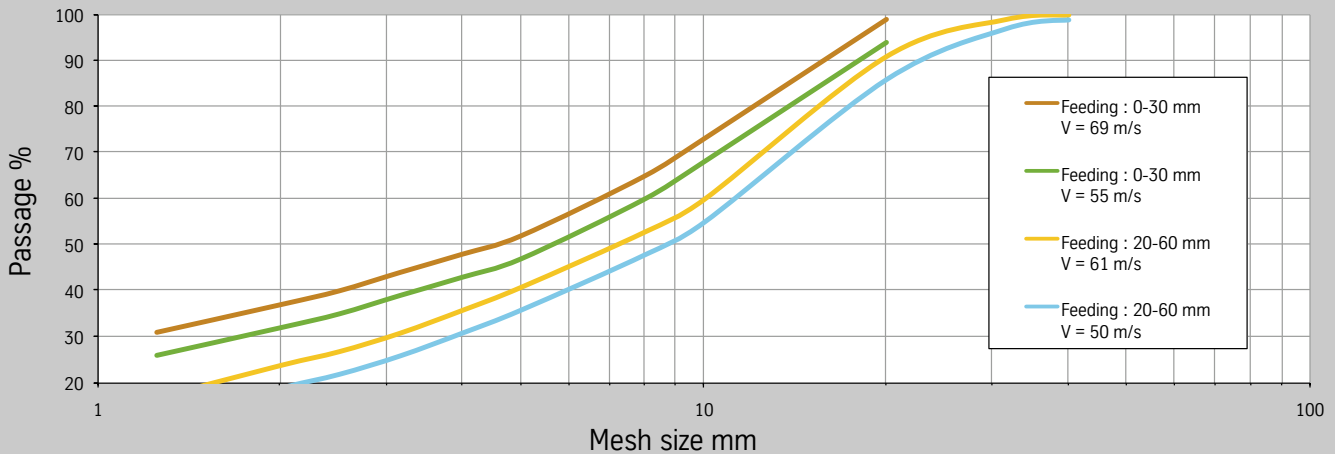

(*) depending on tip speed and kind of material

ThyssenKrupp KH Mineral SAS

Parc Industriel Sud - ZI Neuwald

1, rue René François Jolly

B.P. 70537

F-57205 Sarreguemines

Tél. (33) 03 87 98 73 73 - Fax (33) 03 87 98 89 18 ou (33) 03 87 95 40 73

Email : contact@khmineral.com

Internet : www.khmineral.com

