


## Primary Impact Crushers Starpactor - PB

- Blow bars : clamped on the rotor by hydraulic wedges
- Rotor : single standardized cast discs mounted on the main shaft
- Impact walls : adjustable by hydraulic jack
- Rotor positioning device : safe and fast changing of the blow bars
- Grinding path in option : adjustable by hydraulic jack, for a better calibration

# Primary Impact Crushers

## Starpactor - PB

Type	Rotor diameter ∅ mm	Rotor width mm	Feed opening L x H mm x mm	Capacity (*) t/h
PB 160/150 CR	1,600	1,500	1,410 x 1,520	400
PB 160/200 CR	1,600	2,000	1,410 x 2,020	650
PB 180/200 CR	1,800	2,000	1,640 x 2,030	800
PB 180/250 CR	1,800	2,500	1,640 x 2,530	1,000
PB 200/200 CR	2,000	2,000	1,845 x 2,030	1,100
PB 200/250 CR	2,000	2,500	1,845 x 2,530	1,300
PB 200/300 CR	2,000	3,000	1,845 x 3,030	1,500
PB 220/250 CR	2,000	2,500	1,950 x 2,530	1,700
PB 220/300 CR	2,200	3,000	1,950 x 3,030	2,000
PB 250/250 CR	2,500	2,500	2,150 x 2,530	1,850

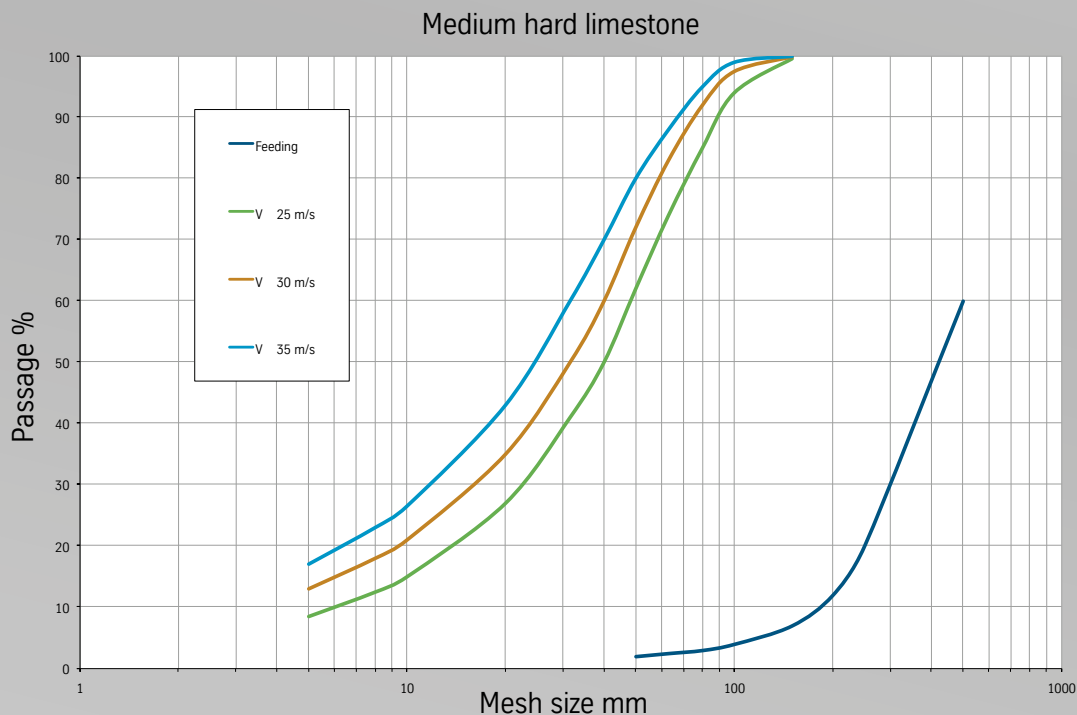

(\*) depending on tip speed, gap and kind of material

### ThyssenKrupp KH Mineral SAS

Parc Industriel Sud - ZI Neuwald

1, rue René François Jolly

B.P. 70537

F-57205 Sarreguemines

Tél. (33) 03 87 98 73 73 - Fax (33) 03 87 98 89 18 ou (33) 03 87 95 40 73

Email : [contact@khmineral.com](mailto:contact@khmineral.com)

Internet : [www.khmineral.com](http://www.khmineral.com)

