

Secondary Impact Crushers - Allpactor - PK For abrasive material


- Regular feeding through integrated vibrating feeder
- Hydraulic assistance with wedges to facilitate the adjustment of the gap
- Wedges for easy blow bars replacement
- Impact plates (or aprons) in chrome casting
- Blow bars in chrome casting with or without ceramic inserts
- Wear plates, 50mm thick, in chrome casting, secured by wedges for quick replacement
- Blow bar lifting clamp for easy maintenance
- Grinding path in option : to give a better form to the final product

Secondary Impact Crushers

Allpactor - PK - for abrasive material

Type	Capacity (*) t/h	Motor kW	Opening H x L mm	Feedig Maxi. mm	Weight kg
PK 0806	30 - 40	37 - 55	270 x 690	150	5,000
PK 1006	40 - 60	45 - 55	350 x 690	180	6,900
PK 1110	80 - 150	90 - 132	400 x 1,020	180	10,500
PK 1115	120 - 250	132 - 250	400 x 1,520	180	13,500
PK 1415	150 - 300	160 - 250	600 x 1,520	220	22,500
PK 1420	250 - 500	250 - 400	600 x 2,020	220	30,000
PK 1425	300 - 600	315 - 450	600 x 2,520	220	35,000
with grinding path					
PKR 1110	80 - 120	110 - 132	400 x 1,020	180	12,000
PKR 1115	120 - 200	160 - 250	400 x 1,520	180	15,500
PKR 1415	160 - 250	200 - 300	600 x 1,520	220	24,000
PKR 1420	250 - 400	300 - 450	600 x 2,020	220	32,000
PKR 1425	300 - 500	400 - 550	600 x 2,520	220	37,500

Medium hard limestone

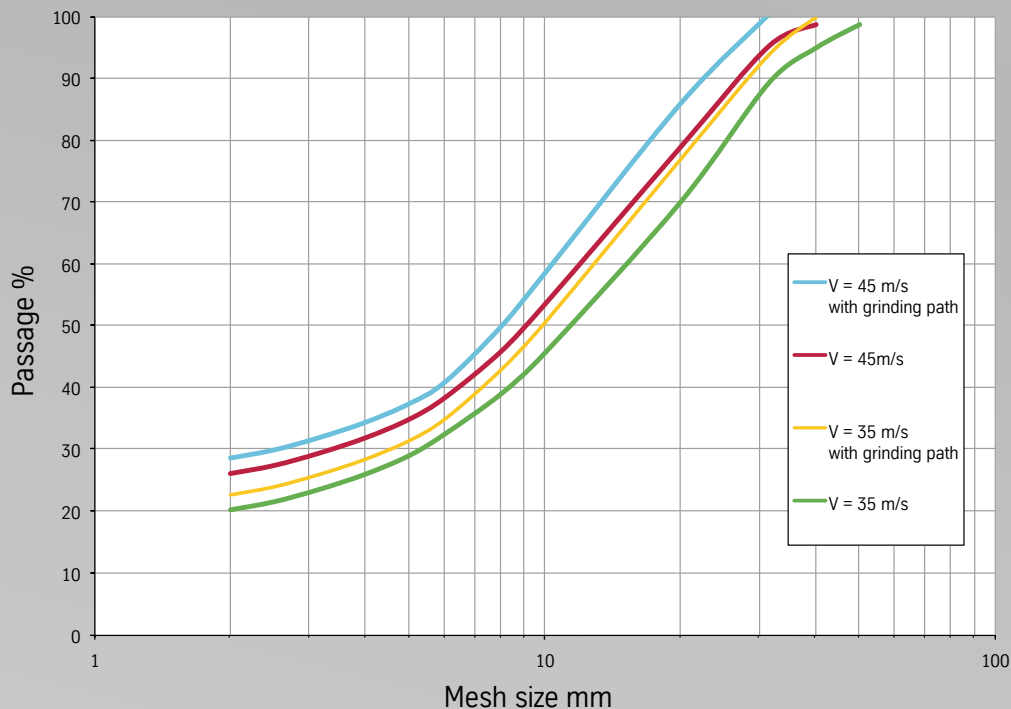

(*) depending on tip speed and kind of material

ThyssenKrupp KH Mineral SAS

Parc Industriel Sud - ZI Neuwald

1, rue René François Jolly

B.P. 70537

F-57205 Sarreguemines

Tél. (33) 03 87 98 73 73 - Fax (33) 03 87 98 89 18 ou (33) 03 87 95 40 73

Email : contact@khmineral.com

Internet : www.khmineral.com

